

Hydronix PG Series Pressure Gauges

Are UV resistant, high quality pressure gauges designed with the OEM in mind. From the special synthetic fluid used to fill the gauges to our special chrome plated stems, we have designed a gauge that is not only accurate but durable.

Hydronix PG Series Pressure Gauges


Have easy-to-read two-tone dials printed in bold UV resistant ink for ease of legibility even after extensive exposure to direct sunlight. Every gauge is tested for accuracy and leakage. Our pressure gauges are designed for demanding applications internationally such as reverse osmosis, oil refining, chemical, food processing plants, water treatment just to name a few.



SS Vessels, Gauges & Meters

LF SERIES SPECIFICATIONS					
	Part Number	Description	Case Quantity	Box Dimension (Inches)	Weight
2.5" LOWER MOUNT	PG25100L	2.5" Gauge 0-100 PSI S.S. 1/4" NPT, Lower Mount	50	15 x 15 x 7	30 lbs
	PG25100B	2.5" Gauge 0-100 PSI S.S. 1/4" NPT, Back Flange	50	16 x 16 x 8	35 lbs
2.5" CENTER BACK MOUNT	PG25300B	2.5" Gauge 0-300 PSI S.S. 1/4" NPT, Back Flange	50	16 x 16 x 8	35 lbs
	PG40100B	4" Gauge 0-100 PSI S.S. 1/4" NPT, Back Flange	18	11 x 18 x 13	27 lbs
4" CENTER BACK MOUNT	PG40300B	4" Gauge 0-300 PSI S.S. 1/4" NPT, Back Flange	18	11 x 18 x 13	27 lbs
	PGS40100B	4" Gauge 0-100 PSI All S.S. 1/4" NPT, Back Flange	18	11 x 18 x 13	30 lbs
	PGS40300B	4" Gauge 0-300 PSI All S.S. 1/4" NPT, Back Flange	18	11 x 18 x 13	30 lbs

Model # Guide

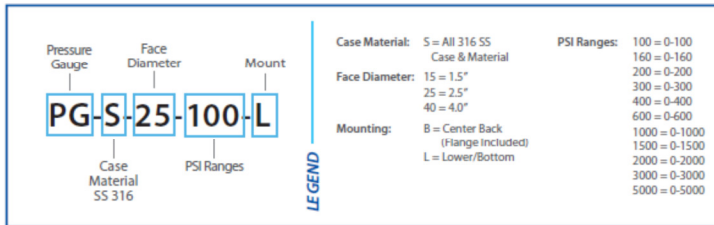

Materials of Construction

- Casings: Brass, 304 SS and 316 SS
- Internals: Brass and 316 SS
- Stems: Chrome-plated brass, 304 SS or 316 SS
- Face: White Aluminum, Black and Blue Print
- Lens: Clear Acrylic
- Pointer: Aluminum, Black
- Fluid: UV Resistant Synthetic Silicone
- Temperature Rating: 0°F (-18°C) to 140°F (60°C)

Optional Features

- Custom dials
- Special connections
- Various case materials
- Custom Labeling

